


Product Code: CU3RCD25B

Luckinslive 437633419

Description: 2 Pole 25A 30mA RCCB - Bi-directional

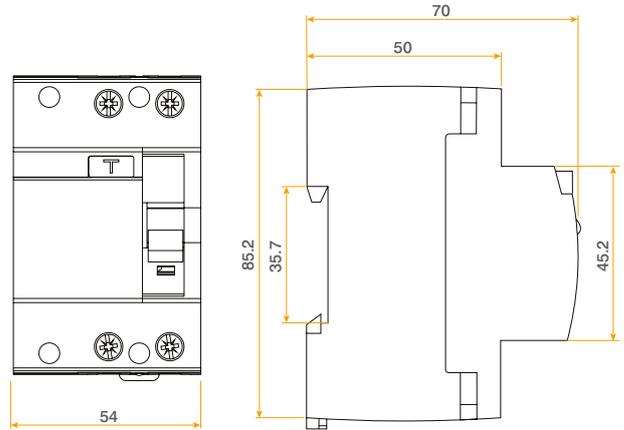

## General Information

Dimensions (mm)	54 (W) x 85.2 (H) x 73 (D)	
Colour	Light Grey	
Rated Operational Voltage (AC) (Ue)	230	
Frequency (Hz)	50/60	
Maximum Rated Current (A) (In)	25	
Impulse Withstand Voltage (Uimp)	4000	
Type	B	
Rated Making & Breaking Capacity (A) (Im)	500	
Tripping Current (mA) (in)	30	
Residual Non-Operating Current (IΔn)	0.5	
Endurance Operations	2000 'ON' & 1000 'OFF' Cycles	
Trip Type	Electro-Magnetic Release	
Bi-directional	Yes	
Device Terminals	Screwed Lug & Pin	
RCD Terminal Capacity (mm <sup>2</sup> )	35	RCD Terminal Torque (Nm) 2.5
Number Of Poles	2 (1+N)	
Ingress Protection	IP20	
Operational Temperature (°C)	-25 to +40	
Warranty (Years)	3	

**Standards** BS EN 61008-1

**Additional Information** For cleaning / polishing of products, use only a soft, dry, clean cloth.

**Compatible Accessories** TPRCDLINK:Three phase RCD Link Kit

