
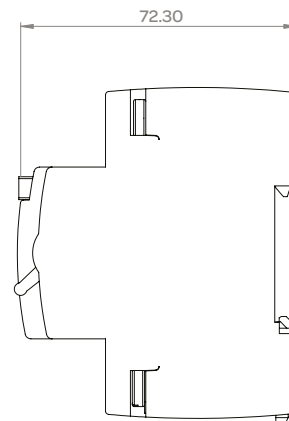


Product Code: CU4RCD63B

Luckinslive 437536260

Description: 4 Pole 63A 30mA (Type B) RCCB

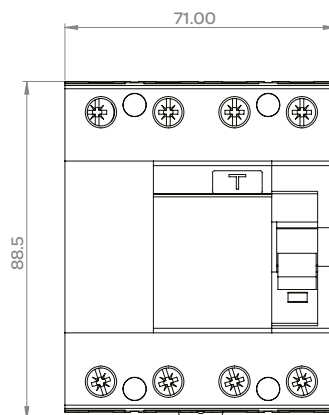

## General Information

|                                           |                               |
|-------------------------------------------|-------------------------------|
| Dimensions (mm)                           | 712 (W) x 85.2 (H) x 70 (D)   |
| Colour                                    | Light Grey                    |
| Rated Operational Voltage (AC) (Ue)       | 400/415                       |
| Frequency (Hz)                            | 50/60                         |
| Maximum Rated Current (A) (In)            | 63                            |
| Impulse Withstand Voltage (Uimp)          | 4000                          |
| Type                                      | B                             |
| Rated Making & Breaking Capacity (A) (Im) | 630                           |
| Tripping Current (mA) (in)                | 30                            |
| Residual Non-Operating Current (IΔn)      | 0.5                           |
| Endurance Operations                      | 2000 'ON' & 1000 'OFF' Cycles |
| Trip Type                                 | Electro-Magnetic Release      |
| Device Terminals                          | Screwed Lug & Pin             |
| RCD Terminal Capacity (mm²)               | 35                            |
| Number Of Poles                           | 4 (3+N)                       |
| Ingress Protection                        | IP20                          |
| Operational Temperature (°C)              | -25 to +40                    |
| Warranty (Years)                          | 3                             |
| RCD Terminal Torque (Nm)                  | 2.5                           |

**Standards** BS EN 61008-1

**Additional Information** For cleaning / polishing of products, use only a soft, dry, clean cloth.

**Compatible Accessories** TPRCDLINK:Three phase RCD Link Kit

