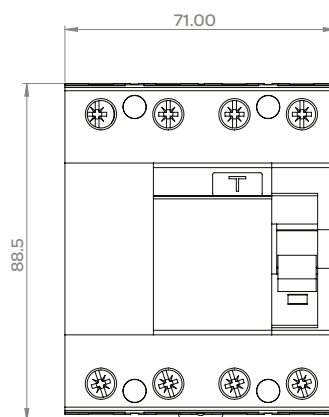


General Information

Dimensions (mm)	71.2 (W) x 85.2 (H) x 70 (D)
Colour	Light Grey
Rated Operational Voltage (AC) (Ue)	400/415
Frequency (Hz)	50/60
Maximum Rated Current (A) (In)	100
Type	S
Tripping Current (mA) (in)	100
Trip Type	Electro-Magnetic Release
Device Terminals	Screwed Lug & Pin
Number Of Poles	4 (3+N)
Ingress Protection	IP20
Operational Temperature (°C)	-25 to +40
Warranty (Years)	3

Standards BS EN 61008-1

Additional Information For cleaning / polishing of products, use only a soft, dry, clean cloth.

Compatible Accessories TPRCDLINK:Three phase RCD Link Kit

