


Product Code: TPEB24

Luckinslive 437535148

Description: 24 Way 125A/250A Three Phase Distribution Board without Incomer

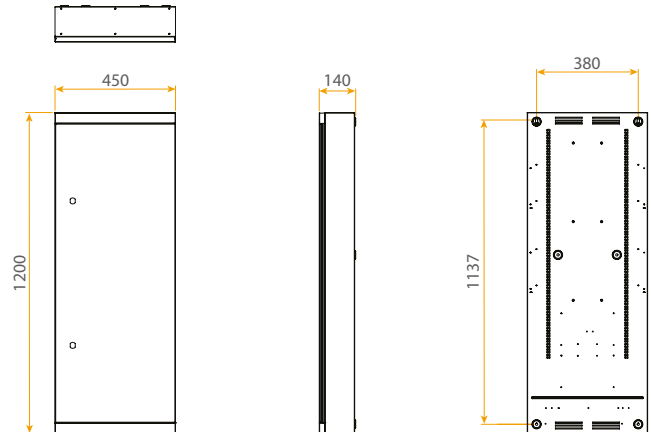

General Information

Dimensions With Door (mm)	450 (W) x 1230 (H) x 140 (D)		
Colour	White		
Materials	Enclosure & Cover: Powder Coated Steel		Pan Assembly / Chassis: Steel
	Plastic Components: ABS & Polycarbonate		
Rated Operational Voltage (AC) (Ue)	230/400		
Frequency (Hz)	50/60		
Busbar Current Rating (A)	250		
Busbar Rating (kA)	25		
Maximum Rated Current (A) (In)	250		
Total Ways	24 (TP), 72 (SP)		
E&N Terminals	Screw		
E&N Bars Capacity (mm²)	25	E&N Bars Torque (Nm)	2
Earth Lug Size	M8	Earth Lug Torque (Nm)	4
Input Terminal Capacity - Rigid (mm²)	95		
Max Cable Tie Width (mm)	8		
Gland PLate	Top & Bottom Removal		
Fire Resistance	650°C / 30s		
Fire Resistance Current Carrying Parts	960°C/30s		
Impact Rating	IK05		
Ingress Protection	IP3X		
Maximum Humidity (%)	95		
Storage Temperature (°C)	-40 to +75		
Operational Temperature (°C)	-5 to +40		
Warranty (Years)	10	Warranty - Devices (Years)	3

Standards BS EN 61439-3

Additional Information For cleaning / polishing of products, use only a soft, dry, clean cloth.

Elucian metal distribution boards allow compliance with BS 7671 Wiring Regulations

Compatible Accessories

- TP2SP:Three Phase to Single Phase converter
- TP250CAP:250A busbar caps (10)
- TPSRBP:Synthetic Bonded Resin Paper with Slot
- TPPLATE:Gland Plate
- TPLABELK:Label Pack
- TPLOCK:Three Phase Isolator Locking Kit
- TPRCDLINK:Three phase RCD Link Kit