
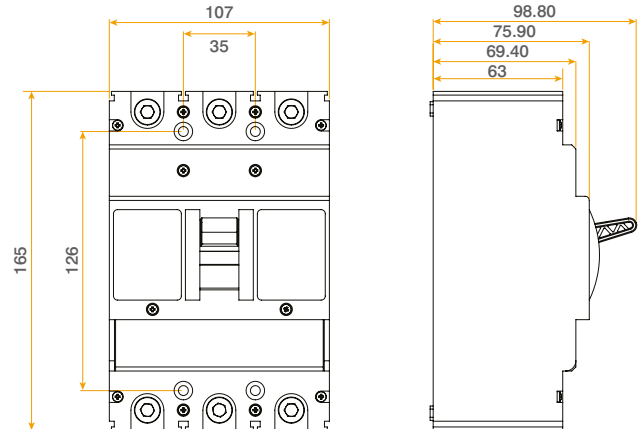


Product Code: TPMS3250K

Luckinslive 437535261

Description: 3 Pole 250A Main switch Kit - 8, 12, 16, 20 & 24 Way

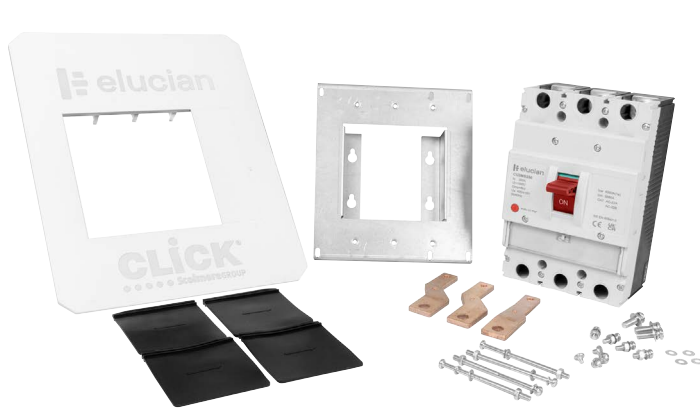

General Information

Colour	Light Grey
Rated Operational Voltage (AC) (Ue)	415
Frequency (Hz)	50/60
Maximum Rated Current (A) (In)	250
Utilisation Category	AC-22A, AC-22B
Rated Short Circuit Withstand Current (Icw)	12 Ie, t=1s
Rated Short Circuit Making Capacity (Icm)	5880A
Rated Making & Breaking Capacity	3Ie, 1.05Ue, COS ϕ =0.65
Rated Insulation Voltage (V) (Ui)	1000
Impulse Withstand Voltage (Uimp)	8000
Main Switch Terminal Capacity (mm ²)	95
Number Of Poles	3
Ingress Protection	IP20
Operational Temperature (°C)	-5 to +35
Warranty (Years)	3

Main Switch Terminal Torque (Nm) 9

Standards BS EN 60947-3

Additional Information For cleaning / polishing of products, use only a soft, dry, clean cloth.

Compatible Accessories TP250BS3: 3 Pole Bottom Shroud

